

# 50JA

Potentiometer with a conductive plastic resistive element

## Nomenclature

- **S** means special mechanical specifications not applicable to our standard.
- **50** means approx. size of base housing in mm.
- **J** means joystick controller.
- **A** means type 1-, 2-, or 3-dimensional coordinates is available and also means potentiometers are mounted outside housing case.
- **K** means square shape.
- **Y** means kind of mechanism:
- **X** means 1-dimensional coordinate. **Y** means 2-dimensional coordinate
- **Z** means 3-dimensional coordinate.

● **Available directions of lever operation**

**Standard version:**

**O** : Omni-directional 360° operating type.

**Special version:**

**I** : I figure (Y) directional operating type.

**L** : L figure (+Y, +X only) directional operating type.


**X** : Cross direction of X and Y operating type.

**Q** : Square-directional 360° operating angle.

**Z** : In addition to omni-directional 360° operation, this type is 3-dimensional coordinate operation by rotating knob in which a potentiometer is mounted on the body side of joystick, and this is standard version, and also can be incorporated inside the rotating knob (T type) on request.

**R** : In addition to square-directional 360° operation, this type is 3-dimensional coordinate operation by rotating knob in which a potentiometer is mounted on the body side of joystick, and this is standard version, and also can be incorporated inside the rotating knob (U type) on request.

**S** : Special operating directions other than the above-mentioned types.

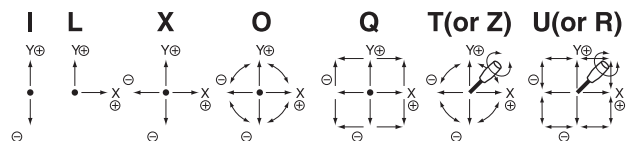

**S** **50** **J** **A** **K**-**Y** **O**-**2** **0** **R2** **G** - **00000**

**Number of potentiometers to be incorporated.**

- 0...no potentiometer incorporated.
- 1...1 potentiometer incorporated.
- 2...2 potentiometers incorporated.
- 3...3 potentiometers incorporated.

**Number of switches to be incorporated.**

- 0...no switch incorporated.
- 1...1 switch incorporated.
- 2...2 switches incorporated.
- 3...3 switches incorporated.
- 4...4 switches incorporated.
- 5...5 switches incorporated.
- 6...6 and over 6 switches incorporated.
- 9...other switches to your special request.

**With spring return device :**

- R1** : with spring return device for 1-dimensional coordinate.
- R2** : with spring return device for 2-dimensional coordinate.
- R3** : with spring return device for 3-dimensional coordinate.

**Mounting accessories :**

- G** : with dust proof rubber cover.
- P** : with sub-panel for mounting.

**Special part number :**

In case we produce customized products, we add 4-digit or 5-digit branch number.



**50JAK-YO-20**  
(Standard)  
(2-dimensional coordinate type)



**50JAK-ZZ-30**  
(3-dimensional coordinate type)

## STANDARD SPECIFICATIONS

### ●Mechanical Performance

**Controlling range of operating lever :**

- 2-dimensional coordinate type : Omni-directionally approx.  $\pm 30^\circ \sim \pm 35^\circ$ , operation from center position.
- 3-dimensional coordinate type : Approx.  $320^\circ$  rotation by knob-operation in addition to the controlling range of 2-dimensional coordinate operation.  
(in case of center-returning type with spring return device, the operating range is approx.  $\pm 45^\circ \sim \pm 50^\circ$  from center position.)

**Operating force :** Without spring return device.  
Standard : Approx. 0.5~0.8N (50~80gf.)  
High torque type : Approx. 2~6N (200~600gf.)  
With spring return device : (subject to directivity)  
X, Y directions : Approx. 0.8~1.5N (80~150gf)  
Z direction : Approx. 20~85mN·m (200~850gf·cm.)

**Operating temperature range :**  $-20^\circ\text{C} \sim +65^\circ\text{C}$   
**Vibration :** 10~55Hz 98m/s<sup>2</sup>  
**Shock :** 294m/s<sup>2</sup>  
**Life expectancy :** Approx. 5,000,000 operations.  
**Mass :** 2-dimensional coordinate type : Approx. 280g  
3-dimensional coordinate type : Approx. 230g


### ●Electrical Performance

**Potentiometers mounted :** SFCP22E 10k  $\Omega \pm 15\%$ , 0.2W, independent linearity tolerance  $\pm 3\%$  (conductive plastic resistive element).

For X and Y axes : Electrical rotating angle : Approx.  $60^\circ$   
For Z axis : Electrical rotating angle : Approx.  $320^\circ$   
With spring return device for Z axis : Electrical rotating angle approx.  $90^\circ$   
[All terminals can be fitted with the AMP110 series fasten receptacle (2.8 × 0.5mm) or equivalents.]  
In case of 3-dimensional coordinate Z-axis potentiometer inside-knob incorporated type (T-type), the following potentiometer is used : SFCP12AC 10k $\Omega \pm 15\%$ , independent linearity tolerance  $\pm 3\%$ , 0.06W (Electrical rotating angle : Approx.  $90^\circ$ )

**Output smoothness :** Below 0.2% against input voltage.  
**Contact resistance variation :** Below 5% C.R.V.  
**Resolution :** Essentially infinite  
**Dielectric strength :** 1 minute at 500V.A.C.  
**Insulation resistance :** Over 1,000M $\Omega$  at 500V.D.C.


### ●Terminal Connection Diagram

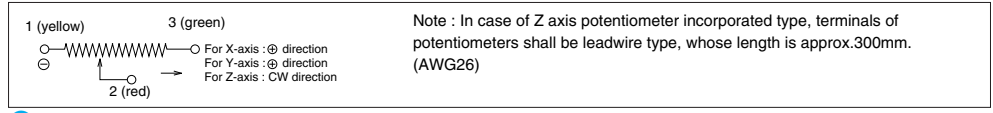


### ●Special Specifications Available

Please see page 47, a table of "Standard and Special Specifications Available".

## Standard Dimensions

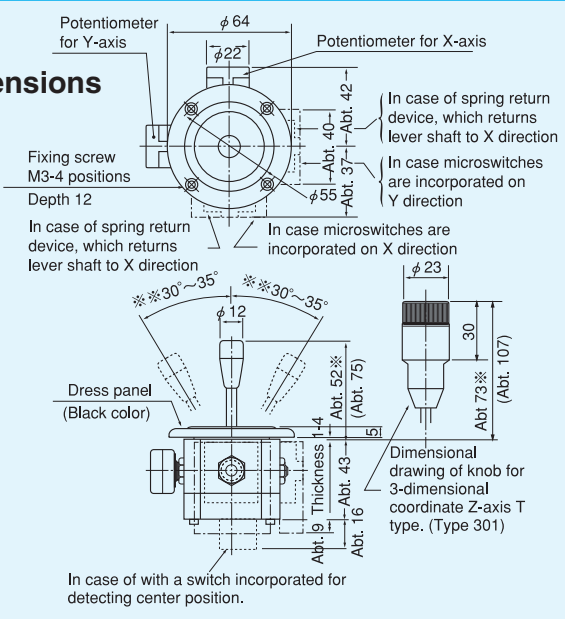

## Panel Arrangements

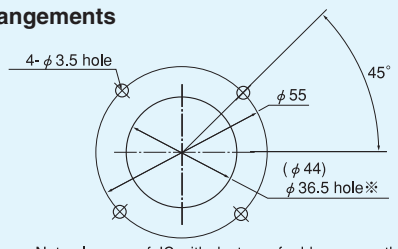

- Note: 1) In case of JC with dust-proof rubber cover, the dimensions of dress panel and "\*" part dimension shall be changed numbers in parentheses.  
2) In case of type Q, R and U, the angle of mark "\*" becomes  $360^\circ$  square-directional and  $20^\circ \sim 25^\circ$  from center position.  
3) 4 pcs. of mounting screw (M3 × 14) are attached.

(Unit : mm)