

AX-3 Series

EN Instruction Sheet
 TR Bilgi Dökümanı
 TW AX-3 系列主機簡易版說明
 CN AX-3 系列主机簡易版說明



5014128402
 2021-08-11



www.deltaww.com

- EN ⚡ This is an OPEN TYPE module and therefore should be installed in an enclosure free of airborne dust, humidity, electric shock and vibration. The enclosure should prevent non-maintenance staff from operating the device (e.g. key or specific tools are required for operating the enclosure) in case danger and damage on the device may occur.
- FR ⚡ Ceci est un module ouvert et il doit donc être installé dans un coffret à l'abri des poussières, des vibrations et ne pas être exposé aux chocs électriques. Le boîtier ou l'armoire doit éviter toute action d'un personnel autre que celui affecté à la maintenance de l'appareil (par exemple, clefs, outils spécifiques pour l'ouverture du coffret), ceci afin d'éviter tout accident corporel ou endommagement du produit).
- TR ⚡ Bu ürün AÇIK TİP bir modül olup toz, rutubet, elektrik şoku ve titreşimden uzak kapalı yerlerde muhafaza edilmelidir. Yanlış kullanım sonucu ürünün zarar görmesini önlemek için yetkili olmayan kişiler tarafından ürüne müdahale edilmesini önleyecek koruyucu önlemler alınmalıdır. (Ürünün bulunduğu panoya kilit konulması gibi).
- TW ⚡ 本機為開放型 (OPEN TYPE) 機種，因此使用者使用本機時，必須將之安裝於具防塵、防潮及免於電擊衝擊意外之外殼配線箱內。另必須具備保護措施 (如：特殊之工具或鑰匙才可打開) 防止非維護人員操作或意外衝擊本體，造成危險及損壞。
- CN ⚡ 本机为开放型 (OPEN TYPE) 机种，因此使用者使用本机时，必须将其安装于具防尘、防潮及免于电击/冲击意外的外壳配线箱内。另必须具备保护措施 (如：特殊的工具或钥匙才可打开) 防止非维护人员操作或意外冲击本体，造成危险及损坏。

EN Please refer to AX-3 Series Operation Manual for details. TR Ayrıntılar için AX-3 Serisi Uygulama Manueline bakınız.
 TW 詳細資料請參考 AX-3 系列操作手冊 CN 详细资料请参考 AX-3 系列操作手冊

EN Assembly TR Montaj TW 安裝 CN 组装

EN	Clip up the two DIN rail clip on the module. Parallel the module groove on the back to the DIN rail, then push and slide along until hearing a click.				
TR	Modül üzerindeki iki DIN ray klipsini dışa doğru çekin. Alttaki modül oyuğunu DIN ray ile paralel konuma getiriniz ve sonra klik sesini duyana kadar klipsleri içe doğru bastırın.				
TW	將模組上下方的兩個 DIN 軌固定扣往中間壓後，將模組後方勾槽平行對準 DIN 軌並往 DIN 軌壓直到喀一聲，即完成。				
CN	将模块上下方的两个 DIN 轨固定扣往中间压后，将模块后方勾槽平行对准 DIN 轨并往 DIN 轨压直到喀一声，即完成。				

EN I/O TR I/O TW 輸入輸出 CN 输入输出


AX-304ELA0PA1T/AX-308EA0MA1T/AX-364ELA0MA1T/AX-304ELA0PA1P/AX-308EA0MA1P/AX-324NA0PA1P/AX-316EA0MA1T/AX-316EB0MA1T				AX-308EA0MA1T/AX-308EA0MA1P/AX-364ELA0MA1T/AX-316EA0MA1T/AX-316EB0MA1T					
IN		Input/Output Wiring		SSI		SS1		ENCODER	
0	8					1	DATA+	1	A1+
1	9					2	DATA-	2	A1-
2	10					6	CLK+	10	B1+
3	11					14	CLK-	11	B1-
4	12					8	GND	4	Z1+
5	13					15	5V	5	Z1-
6	14							15	+5V1
7	15								3
S/S0	S/S1						9	A2-	
OUT							6	B2+	
0	4						12	B2-	
1	5						13	Z2+	
2	6						14	Z2-	
3	7						7	+5V2	
C0	C0						8	0V	

EN Dimensions(mm) & Product Profile

TR Ölçüler(mm) & Ürün Görünüşü

TW 尺寸 (mm) 及產品外觀

CN 尺寸 (mm) 及產品外觀

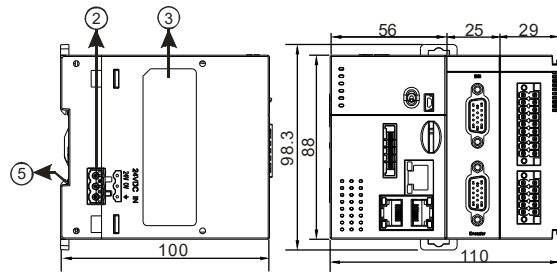

AX-300NA0PA1

AX-304ELA0PA1P/
AX-304ELA0PA1T

AX-308EA0MA1T/AX-308EA0MA1P/
AX-364ELA0MA1T/AX-316EA0MA1T/
AX-316EB0MA1T

AX-324NA0PA1P







Table with 4 columns: EN, TR, TW, CN. It lists 18 components and their descriptions in multiple languages.

Table containing hazardous substances information (Pb, Hg, Cd, Cr VI, PBB, PBDE) and contact information for Delta Electronics in various regions (Asia, Americas, Europe, Iberia, Turkey, MEA).