



Smarter. Greener. Together.

基本型人机界面




硬件规格

型号		
		7" TFT LCD
		16-bit
	(Pixels)	800 480
		LED Back Light
	(cd/m ²)	400
	() ⁻¹	20,000
		154.08 85.92 mm
		ARM Cortex-A8 (800MHz)
Flash ROM (Bytes)		128 Mbytes
RAM (Bytes)		128 Mbytes
		1,000,000
		Multi-Tone Frequency (2K~4KHz)/80 dB
	AUX	N/A
		N/A
USB		1 USB Slave Ver 2.0; 1 USB Host Ver 2.0
SD		N/A
	COM1	RS-232()/RS-485
	COM2	RS-422/RS-485
	COM3	N/A
		CE (300ohm/100MHz)
		IP65 (
²		DC +24V (-15%~+15%) Class 2 SELV (MAINS
		DC24V FG AC500V 1
⁴		Max. 8.6W ²
		3V CR2032 1
		25 °C
		0 °C~50 °C
		-20 °C~60 °C
		10%~90% RH (0~40 °C) 10%~55% RH (41~50 °C) 2
		IEC 61131-2 5Hz~8.3Hz 3.5mm 8.3Hz~150Hz 1g
		IEC 60068-2-27 15g peak 11ms X Y Z 6
		215(W) 161(H) 36.5(D)mm
		196.9(W) 142.9(H)mm
		700g


1)
2)
3)
4)
5)

开孔尺寸

mm (inch)

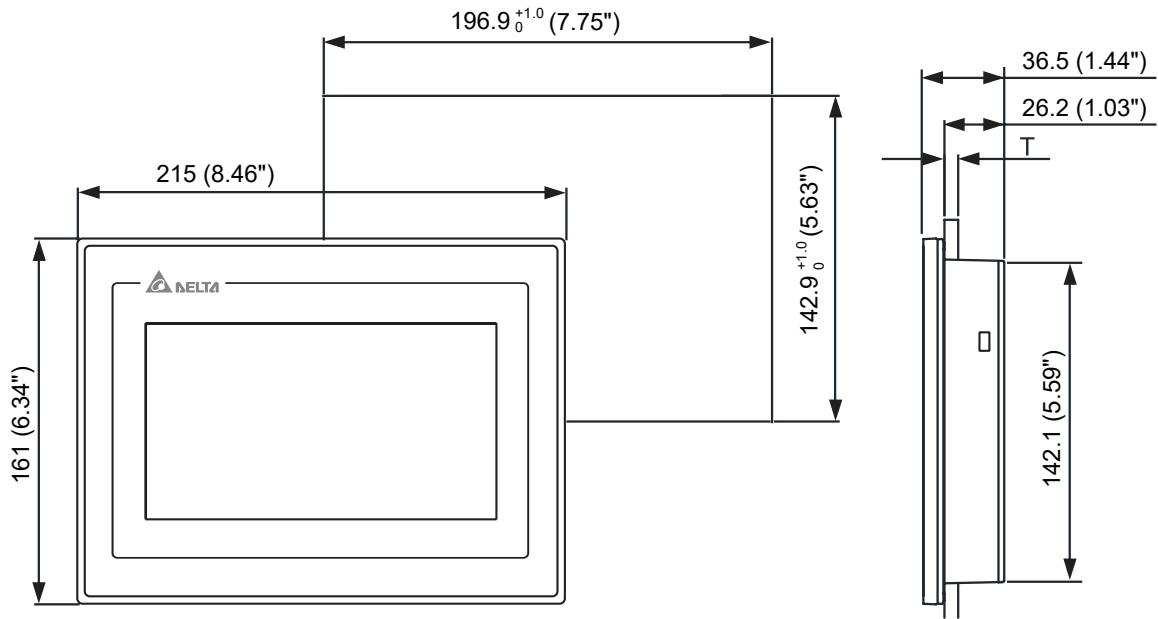

Note:
T-1.6 mm ~ 6 mm (0.063" ~ 0.24")

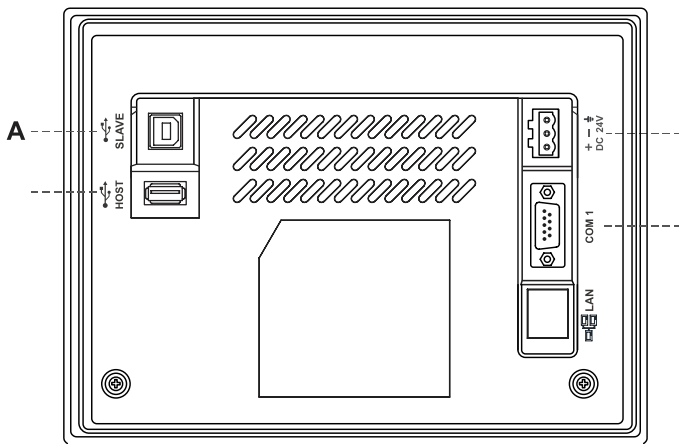

	USB Slave		USB HOST
	(24AWG wire min.)		COM1

 **DELTA 台达**
中达电通股份有限公司

地址：上海市浦东新区民夏路238号
邮编：201209
电话：(021) 5863-5678
传真：(021) 5863-0003
网址：<http://www.delta-china.com.cn>

